



C2H

Heat Sealer Machine

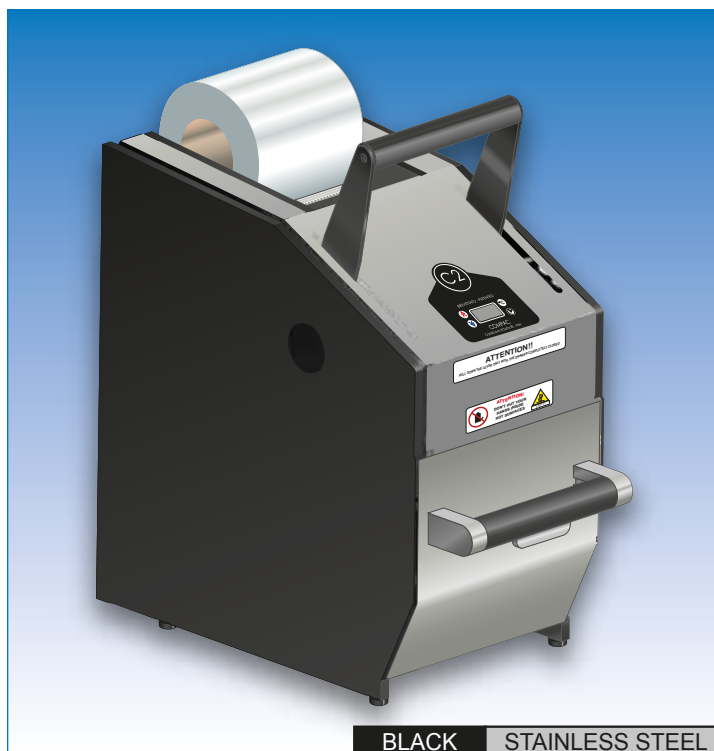


Table Top Heat Sealing Machine.
Digital control panel with a setting of temperature and time sealing.
Multi format. Possibility to seal 6 different formats without changing the mold:

P1 - 137 x 95 mm	H - 214 x 142 mm
P2 - 137 x 120 mm	L - 230 x 190 mm
G - 190 x 137 mm	M - 260 x 190 mm


COMPAC SYSTEM

- | | |
|--------------------------|--------------------------------------|
| ■ Containers in PLA | ■ Containers in PP |
| ■ Containers in APET | ■ Containers in CPET |
| ■ Containers in CA + PLA | ■ Containers in ALUMINIUM (ALc/ALbn) |
| ■ Containers in CA + PET | |

C2H

FILM REEL B1 + FILM REEL B2

DATA SHEET

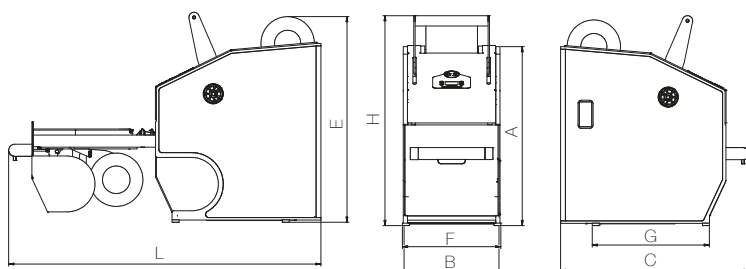

- Total weight: 43 Kg. approx. (without reel)
- Power supply: single-phase + earth
- Power voltage: 220 V ± 10%
- Power frequency: 50 Hz
- OVERALL DIMENSIONS mm:
A: 520 B: 281 C: 547 E: 598 H: 610 L: 907
- MINIMUM DIMENSIONS OF WORKTABLE mm:
F: 286 G: 340
- Format and Film reel used:
CONTAINERS Series P1 - P2 - G - H
with B1 REELS
width 150mm - MAX Ø 155mm.
CONTAINERS Series G - L - M
with B2 REELS
width 210mm - MAX Ø 155mm.

MATERIALS

CONTAINERS

PP From 0°C to +110°C			APET From -40°C to +70°C			CA+PET From -40°C to +200°C			ALc From -40°C to +200°C			PLA From 0°C to +40°C		
APR30T	P1	136 x 95 x 30	GB30PT	P1	137 x 95 x 30	V45PC	P2	137 x 122 x 45	VA45Pc	P2	142 x 126 x 45	GD30PT	P1	137 x 95 x 30
APR45T	P1	136 x 95 x 45	GB45PT	P1	137 x 95 x 45	V33GC	G	192 x 140 x 33	VA45Gc	G	196 x 142 x 45	GD45PT	P1	137 x 95 x 45
APR63T	P1	136 x 95 x 63	GB63PT	P1	137 x 95 x 63	V45GC	G	192 x 140 x 45	VA40GLc	GL	197 x 155 x 40	GD63PT	P1	137 x 95 x 63
APN45T	P2	136 x 120 x 45	GB45PNT	P2	137 x 120 x 45	V75GC	G	192 x 140 x 75	VA45Hc	H	214 x 142 x 45	GD45PNT	P2	137 x 120 x 45
APN65T	P2	136 x 120 x 65	GB65PNT	P2	137 x 120 x 65	V45HC	H	214 x 142 x 45	VA75Hc	H	214 x 142 x 75	GD65PNT	P2	137 x 120 x 65
APN82T	P2	136 x 120 x 82	GB82PNT	P2	137 x 120 x 82	VR25LC	L	232 x 192 x 25	VA45Lc	L	233 x 196 x 45	GD82PNT	P2	137 x 120 x 82
AG25T	G	190 x 136 x 25	GB25GT	G	190 x 137 x 25	V45LC	L	232 x 192 x 45	VA45Mc	M	266 x 196 x 45	GD25GT	G	190 x 137 x 25
AG38T	G	190 x 136 x 38	GB38GT	G	190 x 137 x 38	VR20MC	M	262 x 192 x 20				GD38GT	G	190 x 137 x 38
AG50T	G	190 x 136 x 50	GB50GT	G	190 x 137 x 50	V45MC	M	262 x 192 x 45				GD50GT	G	190 x 137 x 50
AG70T	G	190 x 136 x 70	GB70GT	G	190 x 137 x 70							GD70GT	G	190 x 137 x 70
AG85TP	G	190 x 136 x 85	GB85GT	G	190 x 137 x 85							GD85GT	G	190 x 137 x 85
AH20T	H	208 x 136 x 20	GB20HT	H	208 x 136 x 20							GD15LT	L	230 x 190 x 15
AH38T	H	208 x 136 x 38	GB38HT	H	208 x 136 x 38							GD25LT	L	230 x 190 x 25
AH50T	H	208 x 136 x 50	GB50HT	H	208 x 136 x 50							GD35LT	L	230 x 190 x 35
AH70T	H	208 x 136 x 70	GB70HT	H	208 x 136 x 70							GD50LT	L	230 x 190 x 50
AH90T	H	208 x 136 x 90	GB90HT	H	208 x 136 x 90							GD65LT	L	230 x 190 x 65
AL25T	L	230 x 190 x 25	GB15LT	L	230 x 190 x 15							GD15MT	M	260 x 190 x 15
AL35T	L	230 x 190 x 35	GRB20LTi	L	230 x 190 x 20							GD25MT	M	260 x 190 x 25
AL50T	L	230 x 190 x 50	GB25LT	L	230 x 190 x 25							GD35MT	M	260 x 190 x 35
AL65T	L	230 x 190 x 65	GB35LT	L	230 x 190 x 35							GD50MT	M	260 x 190 x 50
AM25T	M	260 x 190 x 25	GB50LT	L	230 x 190 x 50							GD65MT	M	260 x 190 x 65
AM35T	M	260 x 190 x 35	GB65LT	L	230 x 190 x 65							GD85MT	M	260 x 190 x 85
AM50T	M	260 x 190 x 50	GB15MT	M	260 x 190 x 15									
AM65T	M	260 x 190 x 65	GRB20MTi	M	260 x 190 x 20									
			GB25MT	M	260 x 190 x 25									
			GB35MT	M	260 x 190 x 35									
			GB50MT	M	260 x 190 x 50									
			GB65MT	M	260 x 190 x 65									
			GB85MT	M	260 x 190 x 85									

MATERIALS

HEAT SEALING FILMS



TABLE TOP SYSTEM			for Containers					
Reference	Characteristics		PP	CA+PET	APET	CPET	ALc	ALbn
B1/B2	T	monolayer / strong seal	X					
B1/B2	TNAF	monolayer / strong seal / anti-fog	X					
B1/B2	TMF	monolayer / strong seal / microperforated	X					
B1/B2	TSB	monolayer / strong seal		X	X	X		
B1/B2	TSBAF	monolayer / strong seal / anti-fog		X	X	X		
B1/B2	TSBMF	monolayer / strong seal / microperforated		X	X	X		
B1/B2	TSPBAF	monolayer / strong seal + peelability / anti-fog		X	X	X		
B1/B2	TPBHAF	monolayer / peelable / anti-fog		X	X	X		
B1/B2	TA	multilayer / strong seal	X					X
B1/B2	TAAF	multilayer / strong seal / anti-fog	X					X
B1/B2	TAPU	multilayer / peelable / universal	X	X	X	X	X	X
B1/B2	TAPUAF	multilayer / peelable / anti-fog / universal	X	X	X	X	X	X
B1/B2	TARBAF	multilayer / resealable / anti-fog		X	X	X		

MATERIALS

HEAT SEALING FILMS



TABLE TOP SYSTEM			for Containers		
Reference	Characteristics		PLA	CA+PLA	ALc
B1/B2	TBFN	monolayer / strong seal / compostable	X	X	
B1/B2	TADFN	multilayer / peelable / compostable	X	X	X



Biodegradable and compostable films, in compliance with norm EN13432.

MATERIALS

TRASPARENT LIDS IN APET



			for Containers				
Item	Series	(mm) L x B	PP	APET	CPET	ALbn	ALc
CTU.B.P (P0515)	P2	149 x 132	X	X	X	X	X
CTU.B.G (G0875)	G	203 x 149	X	X	X	X	X
CTU.B.H (H0975)	H	221 x 149	X	X	X	X	X
CTU.B.L (L1570)	L	240 x 203	X	X	X	X	X
CTU.B.M (M1820)	M	273 x 203	X	X	X	X	X

No responsibility is implied or may be linked to this catalog. All technical data does not have scientific value and are reported only for the purpose technical / application of the product. Technological suitability: the product must always be verified by the user as regards the technological suitability referring to the production process, the packaging environment and the food to be packaged.

Compac s.r.l.
Via Spallanzani 8/a
42024 Castelnovo di Sotto - RE - Italy
Tel. +39 0522.688.509 / +39 0522.683.873
www.compac.it - info@compac.it

SCAN THE QR CODE AND FIND OUT MORE



COMPANY WITH
FOOD SAFETY SYSTEM
CERTIFIED BY DNV
ISO 22000

COMPANY WITH
MANAGEMENT SYSTEM
CERTIFIED BY DNV
ISO 9001-ISO 14001
ISO 45001

