



C2MCS

Heat Sealer Machine



WHITE

Table Top Heat Sealing Machine.
Digital control panel with a setting of temperature and time sealing.
Multi format. Possibility to seal 5 different formats without changing the mold:

P1 – 137 x 95 mm
P2 – 137 x 120 mm
G – 190 x 137 mm

L – 230 x 190 mm
M – 260 x 190 mm


COMPAC SYSTEM

- Containers in PLA
- Containers in APET
- Containers in CA + PLA
- Containers in CA + PET
- Containers in PP
- Containers in CPET
- Containers in ALUMINIUM (ALc/ALbn)

C2MCS

FILM REEL B2 + FILM SHEET

DATA SHEET

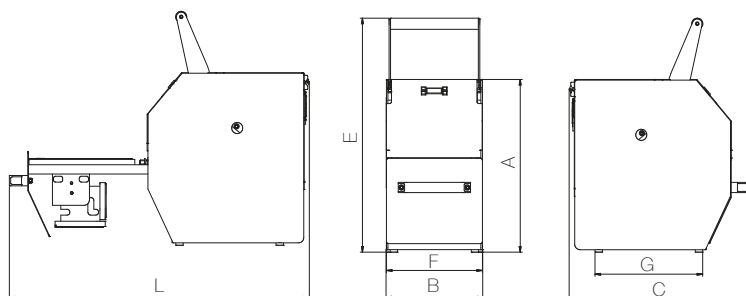

- Total weight: 42 Kg. approx. (without reel)
- Power supply: single-phase + earth
- Power voltage: 220 V $\pm$ 10%
- Power frequency: 50 Hz
- OVERALL DIMENSIONS mm:
A: 480 B: 270 C: 489 E: 620 L: 813
- MINIMUM DIMENSIONS OF WORKTABLE mm:
F: 240 G: 295
- Format and Film reel used:
CONTAINERS Series P1 - P2
with FILM SHEETS
- CONTAINERS Series G - L - M
with B2 REELS
width 210mm - MAX $\varnothing$ 155mm.

MATERIALS

CONTAINERS

PP			APET			CA+PET			ALc			PLA		
From 0°C to +110°C			From -40°C to +70°C			From -40°C to +200°C			From -40°C to +200°C			From 0°C to +40°C		
APR30T	P1	136 x 95 x 30	GB30PT	P1	137 x 95 x 30	V45PC	P2	137 x 122 x 45	VA45Pc	P2	142 x 126 x 45	GD30PT	P1	137 x 95 x 30
APR45T	P1	136 x 95 x 45	GB45PT	P1	137 x 95 x 45	V33GC	G	192 x 140 x 33	VA45Gc	G	196 x 142 x 45	GD45PT	P1	137 x 95 x 45
APR63T	P1	136 x 95 x 63	GB63PT	P1	137 x 95 x 63	V45GC	G	192 x 140 x 45	VA45Lc	L	233 x 196 x 45	GD63PT	P1	137 x 95 x 63
APN45T	P2	136 x 120 x 45	GB45PNT	P2	137 x 120 x 45	V75GC	G	192 x 140 x 75	VA45Mc	M	266 x 196 x 45	GD45PNT	P2	137 x 120 x 45
APN65T	P2	136 x 120 x 65	GB65PNT	P2	137 x 120 x 65	VR25LC	L	232 x 192 x 25				GD65PNT	P2	137 x 120 x 65
APN82T	P2	136 x 120 x 82	GB82PNT	P2	137 x 120 x 82	V45LC	L	232 x 192 x 45				GD82PNT	P2	137 x 120 x 82
AG25T	G	190 x 136 x 25	GB25GT	G	190 x 137 x 25	VR20MC	M	262 x 192 x 20	ALbn			GD25GT	G	190 x 137 x 25
AG38T	G	190 x 136 x 38	GB38GT	G	190 x 137 x 38	V45MC	M	262 x 192 x 45	From -40°C to +200°C			GD38GT	G	190 x 137 x 38
AG50T	G	190 x 136 x 50	GB50GT	G	190 x 137 x 50				V45Pabn	P2	142 x 126 x 45	GD50GT	G	190 x 137 x 50
AG70T	G	190 x 136 x 70	GB70GT	G	190 x 137 x 70	CPET			V45Gabn	G	196 x 142 x 45	GD70GT	G	190 x 137 x 70
AG85TP	G	190 x 136 x 85	GB85GT	G	190 x 137 x 85	From -40°C to +180°C			V45Labn	L	233 x 196 x 45	GD85GT	G	190 x 137 x 85
AL25T	L	230 x 190 x 25	GB15LT	L	230 x 190 x 15	D45P	P2	136 x 120 x 45	CA+PLA			GD15LT	L	230 x 190 x 15
AL35T	L	230 x 190 x 35	GRB20LTi	L	230 x 190 x 20	D65P	P2	136 x 120 x 65	From -40°C to +200°C			GD25LT	L	230 x 190 x 25
AL50T	L	230 x 190 x 50	GB25LT	L	230 x 190 x 25	D38G	G	190 x 136 x 38	V45PCD	P2	137 x 122 x 45	GD35LT	L	230 x 190 x 35
AL65T	L	230 x 190 x 65	GB35LT	L	230 x 190 x 35	D50G	G	190 x 136 x 50	V33GCD	G	192 x 140 x 33	GD50LT	L	230 x 190 x 50
AM25T	M	260 x 190 x 25	GB50LT	L	230 x 190 x 50	DT50G	G	190 x 136 x 50	V45GCD	G	192 x 140 x 45	GD65LT	L	230 x 190 x 65
AM35T	M	260 x 190 x 35	GB65LT	L	230 x 190 x 65	D70G	G	190 x 136 x 70	VR25LCD	L	232 x 192 x 25	GD15MT	M	260 x 190 x 15
AM50T	M	260 x 190 x 50	GB15MT	M	260 x 190 x 15	D38L	L	230 x 190 x 38	V75GCD	G	192 x 140 x 75	GD25MT	M	260 x 190 x 25
AM65T	M	260 x 190 x 65	GRB20MTi	M	260 x 190 x 20	D50L	L	230 x 190 x 50	VR25LCD	L	232 x 192 x 25	GD35MT	M	260 x 190 x 35
			GB25MT	M	260 x 190 x 25	DB50L	L	230 x 190 x 50	V45LCD	L	232 x 192 x 45	GD50MT	M	260 x 190 x 50
			GB35MT	M	260 x 190 x 35	D38M	M	260 x 190 x 38	VR20MCD	M	262 x 192 x 20	GD65MT	M	260 x 190 x 65
			GB50MT	M	260 x 190 x 50	D50M	M	260 x 190 x 50	V45MCD	M	262 x 192 x 45			
			GB65MT	M	260 x 190 x 65	D65M	M	260 x 190 x 65						

MATERIALS

HEAT SEALING FILMS



TABLE TOP SYSTEM

			for Containers					
Reference	Characteristics		PP	CA+PET	APET	CPET	ALc	ALbn
B2	T	monolayer / strong seal	X					
B2	TNAF	monolayer / strong seal / anti-fog	X					
B2	TMF	monolayer / strong seal / microperforated	X					
B2	TSB	monolayer / strong seal		X	X	X		
B2	TSBAF	monolayer / strong seal / anti-fog		X	X	X		
B2	TSBMF	monolayer / strong seal / microperforated		X	X	X		
B2	TSPBAF	monolayer / strong seal + peelability / anti-fog		X	X	X		
B2	TPBHAf	monolayer / peelable / anti-fog		X	X	X		
B2	TA	multilayer / strong seal	X					X
B2	TAAF	multilayer / strong seal / anti-fog	X					X
B2	TPU	multilayer / peelable / universal	X	X	X	X	X	X
B2	TPUMAF	multilayer / peelable / anti-fog / universal	X	X	X	X	X	X

MATERIALS

HEAT SEALING FILMS



TABLE TOP SYSTEM

			for Containers		
Reference	Characteristics		PLA	CA+PLA	ALc
B2	TBFN	monolayer / strong seal / compostable	X	X	
B2	TADFN	multilayer / peelable / compostable	X	X	X



Biodegradable and compostable films,
in compliance with norm EN13432.

MATERIALS

TRASPARENT LIDS IN APET



			for Containers				
Item	Series	(mm) L x B	PP	APET	CPET	ALbn	ALc
CTU.B.P (P0515)	P2	149 x 132	X	X	X	X	X
CTU.B.G (G0875)	G	203 x 149	X	X	X	X	X
CTU.B.L (L1570)	L	240 x 203	X	X	X	X	X
CTU.B.M (M1820)	M	273 x 203	X	X	X	X	X

No responsibility is implied or may be linked to this catalog.

All technical data does not have scientific value and are reported only for the purpose technical / application of the product.

Technological suitability: the product must always be verified by the user as regards the technological suitability referring to the production process, the packaging environment and the food to be packaged.

Compac s.r.l.
Via Spallanzani 8/a
42024 Castelnovo di Sotto - RE - Italy
Tel. +39 0522.688.509 / +39 0522.683.873
www.compac.it - info@compac.it

SCAN THE QR CODE
AND FIND OUT MORE



COMPANY WITH
FOOD SAFETY SYSTEM
CERTIFIED BY DNV
ISO 22000

COMPANY WITH
MANAGEMENT SYSTEM
CERTIFIED BY DNV
ISO 9001-ISO 14001
ISO 45001

