


Heat Sealing Films

> The Heat Sealing Films of the COMPAC SYSTEM

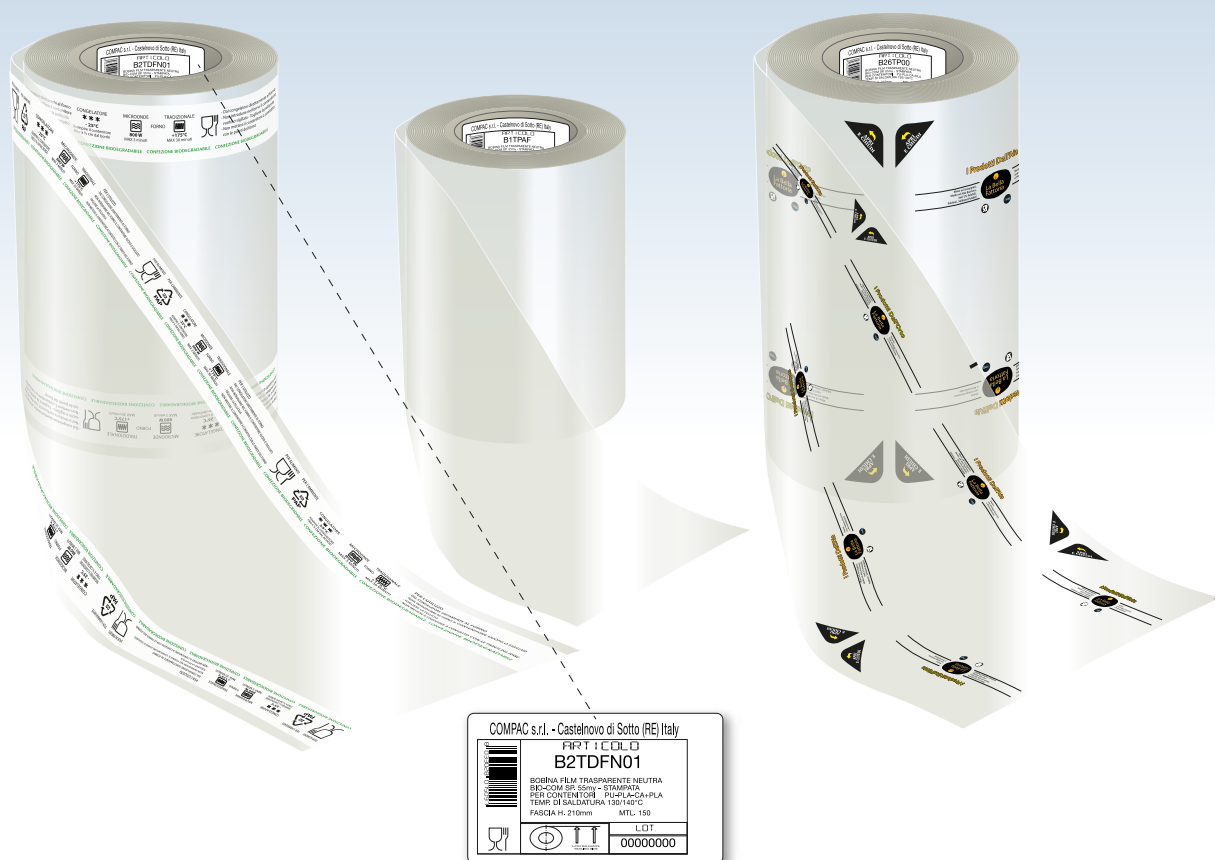

> The Heat Sealing Films of the COMPAC SYSTEM

COMPAC has developed a wide range of sealing films suitable for food packaging and in particular for the range of trays designed for the COMPAC SYSTEM.

Manufactured from various raw materials, we supply films in various widths and lengths (standard widths B1=15 cm / B2=21 cm / B26=26 cm / B32=32 and B35=35 cm) and with technical properties that cover a large variety of customers' requirements.

For the COMPAC SYSTEM, we have designed lidding films with various characteristics in mono or multilayer, with medium or high barrier, anti-fog, anti-UV, peelable, with high strength weld seal or both strong seal and peelability.

We offer generic prints and we are able to customize the print depending on the quantities.

Compac s.r.l.
Via Spallanzani 8/a
42024 Castelnuovo di Sotto - RE - Italy
Tel. +39 0522.688.509 / +39 0522.683.873
www.compac.it - info@compac.it

- Containers in PLA
- Containers in APET
- Containers in CA + PLA
- Containers in PULP
- Containers in CA + PET
- Containers in PP
- Containers in CPET
- Containers in ALUMINIUM (ALc/ALbn)

COMPAC
PACKAGING

Heat Sealing Films

> Heat Sealing Films Range

Range

Table Top System

Reference	Characteristics	PP	CA+PET	APET	for Containers			
					CPET	ALc	ALbn	PULP
T	monolayer / strong seal	X						
TNAF	monolayer / strong seal / anti-fog	X						
TMF	monolayer / strong seal / microperforated	X						
TSB	monolayer / strong seal		X	X	X			
TSBAF	monolayer / strong seal / anti-fog		X	X	X			
TSBMF	monolayer / strong seal / microperforated		X	X	X			
TSPBAF	monolayer / strong seal+peelability / anti-fog		X	X	X			
TPBBAF	monolayer / peelable / anti-fog		X	X	X			
TA	multilayer / strong seal	X					X	X
TAAF	multilayer / strong seal / anti-fog	X					X	X
TAPU	multilayer / peelable / universal	X	X	X	X	X	X	X
TAPUAF	multilayer / peelable / anti-fog / universal	X	X	X	X	X	X	X
TARBAF	multilayer / resealable / anti-fog		X	X	X			

Systems for modified atmosphere

Reference	Characteristics	Barrier to Gas	PP	for Containers			
				APET	CPET	ALc	ALbn
TAASBX	multilayer / strong seal / anti-fog	HIGH		X	X		
TAAPBHX	multilayer / peelable / anti-fog	HIGH		X	X		
TAAPBHUX	multilayer / peelable / anti-fog / anti-UV	HIGH		X	X		
TAPXAF	multilayer / peelable / anti-fog	HIGH	X			X	X
TAXAF	multilayer / strong seal / anti-fog	HIGH	X				X

green line Range

Table Top System



BIODEGRADABLE and **COMPOSTABLE** films,
in compliance with the certification standards from TÜV AUSTRIA
in reference to the European norm UNI EN13432.

Reference	Characteristics	PLA	for Containers		
			CA+PLA	PULP	ALc
TBFN	monolayer / strong seal / compostable	X	X		
TADFN	multilayer / peelable / compostable	X	X	X	X

Systems for modified atmosphere

Reference	Characteristics	Barrier to Gas	for Containers	
			PLA	
TAASDX	multilayer / strong seal / anti-fog	HIGH		X
TAASDUX	multilayer / strong seal / anti-fog / anti-UV	HIGH		X

Informations for Operators / Consumers

MEDIUM AND HIGH BARRIER: level of barrier to GAS required to improve the product SHELF-LIFE.

ANTI-FOG (AF): treatment that prevents condensation for a more aesthetic product presentation.

ANTI-UV: treatment that filters light and reduces effect of UV rays, particularly required for sliced delicatessen meat packed in MAP.

STRONG SEAL: characteristic that guarantees a high strength weld seal for the safety of the product and prevents any kind of leaks. The consumer has to make an incision to open the pack.

STRONG SEAL / PEELABLE: characteristic that allows to reheate the product in conventional oven or microwave, the film keeps a strong seal until 125°C and becomes peelable over 125°C.

PEELABLE: characteristic that provides an easy opening of the packaging.

No responsibility is implied or may be linked to this catalog.

All technical data does not have scientific value and are reported only for the purpose technical / application of the product.

Technological suitability: the product must always be verified by the user as regards the technological suitability referring to the production process, the packaging environment and the food to be packaged.

Compac s.r.l.
Via Spallanzani 8/a
42024 Castelnovo di Sotto - RE - Italy
Tel. +39 0522.688.509 / +39 0522.683.873
www.compac.it - info@compac.it

SCAN THE QR CODE
AND FIND OUT MORE



COMPANY WITH
FOOD SAFETY SYSTEM
CERTIFIED BY DNV
ISO 22000

COMPANY WITH
MANAGEMENT SYSTEM
CERTIFIED BY DNV
ISO 9001 - ISO 14001
ISO 45001

COMPAC
PACKAGING