

## Heat Sealer Machines



COMPAC designs, manufactures and supports multi-format Heat Sealer Machines with default mold change which allow to seal wide ranges of containers. Are working tools that ensure high safety of use, combined with practicality and efficiency and allow to obtain a sealed package for maximum hygiene and product protection content

The Heat Sealer Machines together with film reels and the

- |                                  |                                 |
|----------------------------------|---------------------------------|
| ■ Containers in PLA              | ■ Containers in CA + PET        |
| ■ Containers in APET             | ■ Containers in PP              |
| ■ Containers in CA + PLA         | ■ Containers in CPET            |
| ■ Containers in CELLULOSE (PULP) | ■ Containers in ALUMINIUM (ALC) |
- make up the

## Paper Dispenser



COMPAC designs, manufactures and supports multi-format Paper Dispensers that optimize the use of cut-sheet paper, eliminating the waste. Allow the operator to define the lengths of the individual formats. Flexible and practical, can be positioned in various ways to maximize the space available at the bench.

PAPER ROLL

width 350mm - MAX Ø 200mm;

width 400mm - MAX Ø 190mm.

The Paper Dispensers together with the paper rolls make up

# COMPAC SYSTEM

## Table Top Heat Sealer Machines



**C1NE**

### WHITE

Digital control panel with a setting of temperature and time sealing. Multi-format through selector.

Sealable formats:

P1 – 137 x 95 mm;

P2 – 137 x 120 mm;

G – 190 x 137 mm.



**C2MCS**

### WHITE

Digital control panel with a setting of temperature and time sealing. Multi-format through selector.

Sealable formats:

P1 – 137 x 95 mm;

P2 – 137 x 120 mm;

G – 190 x 137 mm;

L – 230 x 190 mm;

M – 260 x 190 mm.



**C2B**

### WHITE

### STAINLESS STEEL

Digital control panel with a setting of temperature and time sealing. Multi-format through selector.

Sealable formats:

P1 – 137 x 95 mm;

P2 – 137 x 120 mm;

G – 190 x 137 mm;

L – 230 x 190 mm;

M – 260 x 190 mm.



**C1HS**

### BLACK

### STAINLESS STEEL

Digital control panel with a setting of temperature and time sealing. Multi-format through selector.


Sealable formats:

P1 – 137 x 95 mm;

P2 – 137 x 120 mm;

G – 190 x 137 mm;

H – 214 x 142 mm.

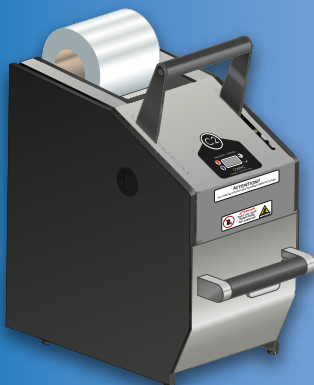

**C2H**

### BLACK

### STAINLESS STEEL

Digital control panel with a setting of temperature and time sealing. Multi-format through selector.

Sealable formats:

P1 – 137 x 95 mm;

P2 – 137 x 120 mm;

G – 190 x 137 mm;

H – 214 x 142 mm;


L – 230 x 190 mm;

M – 260 x 190 mm.

**C1NE**

**FILM REEL B1**

**DATA SHEET**

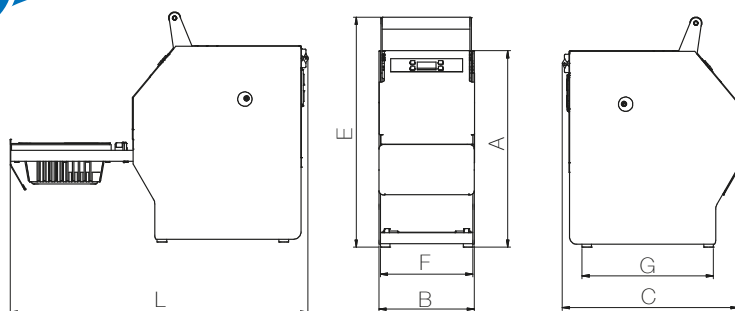


- Total weight: 22 Kg. approx. (without reel)
- Power supply: single-phase + earth
- Power voltage: 220 V  $\pm$  10%
- Power frequency: 50 Hz
- OVERALL DIMENSIONS mm:  
A: 414 B: 207 C: 366 E: 495 L: 620
- MINIMUM DIMENSIONS OF WORKTABLE mm:  
F: 195 G: 275
- Format and Film reel used:  
CONTAINERS Series P1 - P2 - G  
with B1 REELS  
width 150mm - MAX  $\varnothing$  155mm.

**C2MCS**

**FILM REEL B2 + FILM SHEET**

**DATA SHEET**

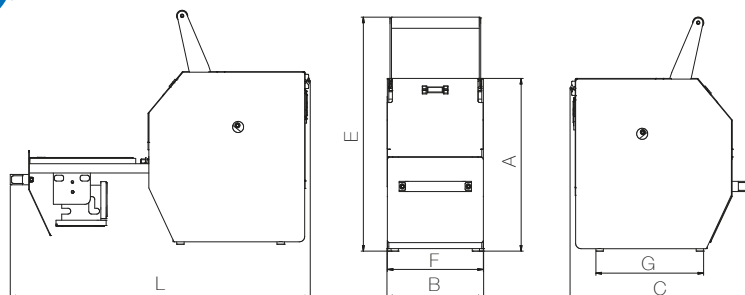


- Total weight: 42 Kg. approx. (without reel)
- Power supply: single-phase + earth
- Power voltage: 220 V  $\pm$  10%
- Power frequency: 50 Hz
- OVERALL DIMENSIONS mm:  
A: 480 B: 270 C: 489 E: 620 L: 813
- MINIMUM DIMENSIONS OF WORKTABLE mm:  
F: 240 G: 295
- Format and Film reel used:  
CONTAINERS Series P1 - P2  
with FILM SHEETS  
CONTAINERS Series G - L - M  
with B2 REELS  
width 210mm - MAX  $\varnothing$  155mm.

**C2B**

**FILM REEL B1 + FILM REEL B2**

**DATA SHEET**

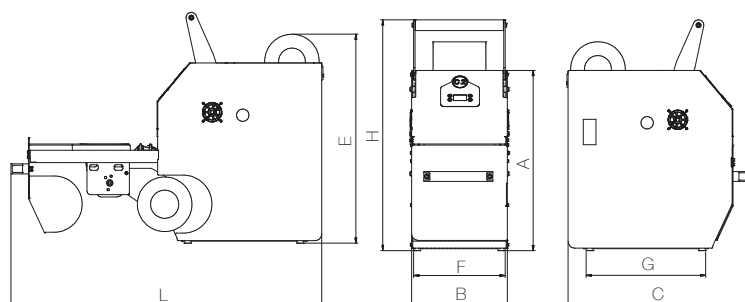


- Total weight: 41 Kg. approx. (without reel)
- Power supply: single-phase + earth
- Power voltage: 220 V  $\pm$  10%
- Power frequency: 50 Hz
- OVERALL DIMENSIONS mm:  
A: 512 B: 272 C: 518 E: 594 H: 655 L: 883,5
- MINIMUM DIMENSIONS OF WORKTABLE mm:  
F: 260 G: 340
- Format and Film reel used:  
CONTAINERS Series P1 - P2  
with B1 REELS  
width 150mm - MAX  $\varnothing$  155mm.  
CONTAINERS Series G - L - M  
with B2 REELS  
width 210mm - MAX  $\varnothing$  155mm.

**C1HS**

**FILM REEL B1**

**DATA SHEET**

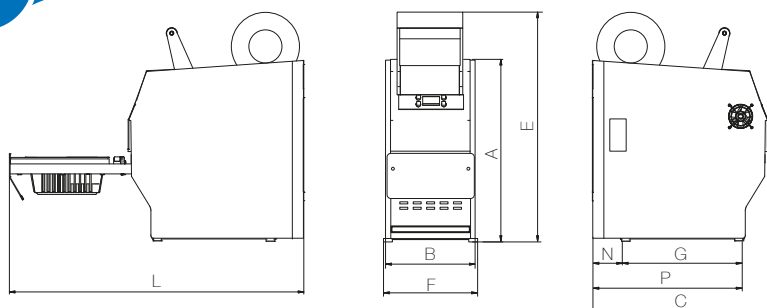


- Total weight: 25 Kg. approx. (without reel)
- Power supply: single-phase + earth
- Power voltage: 220 V  $\pm$  10%
- Power frequency: 50 Hz
- OVERALL DIMENSIONS mm:  
A: 415 B: 207 C: 401 E: 520 L: 675
- MINIMUM DIMENSIONS OF WORKTABLE mm:  
F: 215 G: 270 N: 67 P: 337
- Format and Film reel used:  
CONTAINERS Series P1 - P2 - G - H  
with B1 REELS  
width 150mm - MAX  $\varnothing$  155mm.

**C2H**

**FILM REEL B1 + FILM REEL B2**

**DATA SHEET**

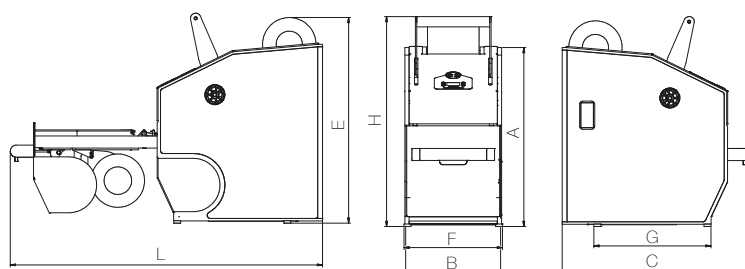

- Total weight: 43 Kg. approx. (without reel)
- Power supply: single-phase + earth
- Power voltage: 220 V  $\pm$  10%
- Power frequency: 50 Hz
- OVERALL DIMENSIONS mm:  
A: 520 B: 281 C: 547 E: 598 H: 610 L: 907
- MINIMUM DIMENSIONS OF WORKTABLE mm:  
F: 286 G: 340
- Format and Film reel used:  
CONTAINERS Series P1 - P2 - G - H  
with B1 REELS  
width 150mm - MAX  $\varnothing$  155mm.  
CONTAINERS Series G - L - M  
with B2 REELS  
width 210mm - MAX  $\varnothing$  155mm.

# Paper Dispenser




D1S

D2S

## D1S

### STAINLESS STEEL

### DATA SHEET

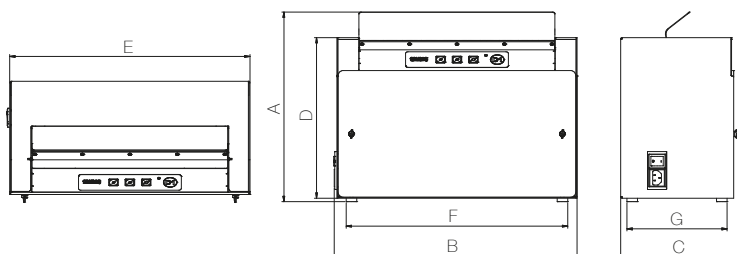


- Total weight: 14,5 Kg. approx. (without reel)
- Power supply: single-phase + earth
- Power voltage: 220 V  $\pm$  10%
- Power frequency: 50 Hz
- OVERALL DIMENSIONS mm:  
A: 354 B: 460 C: 230 D: 302 E: 455,5
- MINIMUM DIMENSIONS OF WORKTABLE mm:  
F: 420 G: 190
- Format and Film reel used:  
PAPER ROLL  
width 350mm - MAX  $\varnothing$  200mm.  
STANDARD MEASUREMENTS OF THE THREE SIZES cm:  
small: 27x35 - average: 40x35 - large: 50x35

## D2S

### STAINLESS STEEL

### DATA SHEET

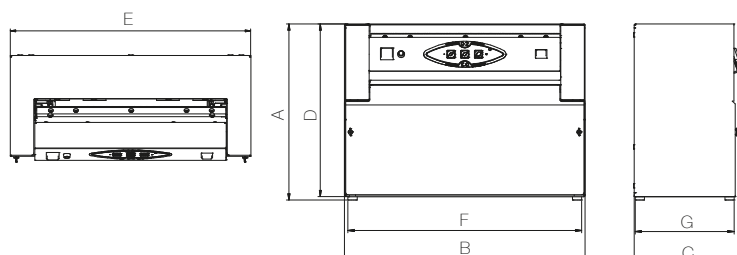

- Total weight: 21,5 Kg. approx. (without reel)
- Power supply: single-phase + earth
- Power voltage: 220 V  $\pm$  10%
- Power frequency: 50 Hz
- OVERALL DIMENSIONS mm:  
A: 385 B: 526 C: 234,5 D: 378 E: 526
- MINIMUM DIMENSIONS OF WORKTABLE mm:  
F: 511 G: 216,5
- Format and Film reel used:  
PAPER ROLLS  
width 350mm - MAX  $\varnothing$  200mm.  
width 400mm - MAX  $\varnothing$  190mm.  
STANDARD MEASUREMENTS OF THE THREE SIZES cm:  
with "L" selection: 27,40,50  
with "H" selection: 33,52,64  
NOTE: the machine can be set directly by the operator to  
unwind any length of paper between 20 and 80cm

