



C2B

Heat Sealer Machine

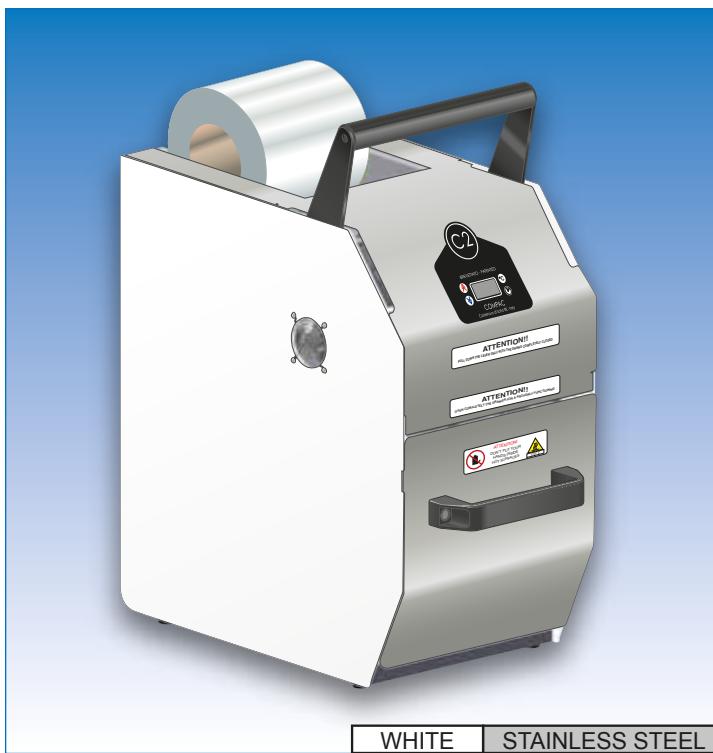


Table Top Heat Sealing Machine.

Digital control panel with a setting of temperature and time sealing.
Multi format. Possibility to seal 5 different formats without changing the mold:

P1 – 137 x 95 mm
P2 – 137 x 120 mm
G – 190 x 137 mm

L – 230 x 190 mm
M – 260 x 190 mm


COMPAC SYSTEM

- Containers in PLA
- Containers in APET
- Containers in CA + PLA
- Containers in CA + PET

- Containers in PP
- Containers in CPET
- Containers in ALUMINIUM (ALc/ALbn)
- Containers in CA + PP

C2B

FILM REEL B1 + FILM REEL B2

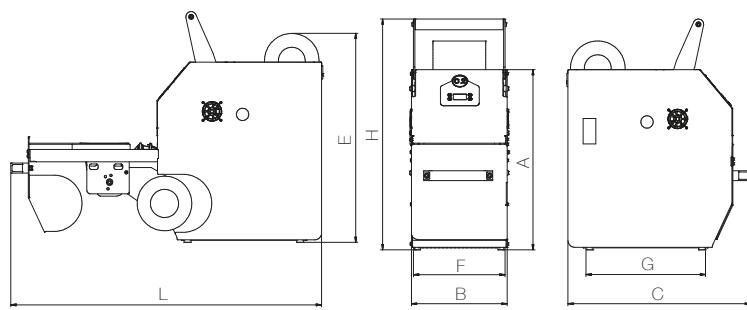

DATA SHEET

- Total weight: 41 Kg. approx. (without reel)
- Power supply: single-phase + earth
- Power voltage: 220 V ± 10%
- Power frequency: 50 Hz
- OVERALL DIMENSIONS mm:
A: 512 B: 272 C: 518 E: 594 H: 655 L: 883,5
- MINIMUM DIMENSIONS OF WORKTABLE mm:
F: 260 G: 340
- Format and Film reel used:
CONTAINERS Series P1 - P2 with B1 REELS width 150mm - MAX Ø 155mm.
CONTAINERS Series G - L - M with B2 REELS width 210mm - MAX Ø 155mm.


MATERIALS

CONTAINERS

PP		APET		CA+PET		ALc		PLA		
<i>From 0°C to +110°C</i>		<i>From -40°C to +70°C</i>		<i>From -40°C to +200°C</i>		<i>From -40°C to +200°C</i>		<i>From 0°C to +40°C</i>		
APR30T	P1	136 x 95 x 30	GB30PT	P1	137 x 95 x 30	V45PC	P2	137 x 122 x 45	GD30PT	P1
APR45T	P1	136 x 95 x 45	GB45PT	P1	137 x 95 x 45	V33GC	G	192 x 140 x 33	GD45PT	P1
APR63T	P1	136 x 95 x 63	GB63PT	P1	137 x 95 x 63	V45GC	G	192 x 140 x 45	GD63PT	P1
APN45T	P2	136 x 120 x 45	GB45PNT	P2	137 x 120 x 45	V75GC	G	192 x 140 x 75	GD45PNT	P2
APN65T	P2	136 x 120 x 65	GB65PNT	P2	137 x 120 x 65	VR25LC	L	232 x 192 x 25	GD65PNT	P2
APN82T	P2	136 x 120 x 82	GB82PNT	P2	137 x 120 x 82	V45LC	L	232 x 192 x 45	GD82PNT	P2
AG25T	G	190 x 136 x 25	GB25GT	G	190 x 137 x 25	VR20MC	M	262 x 192 x 20	GD25GT	G
AG38T	G	190 x 136 x 38	GB38GT	G	190 x 137 x 38	V45MC	M	262 x 192 x 45	GD38GT	G
AG50T	G	190 x 136 x 50	GB50GT	G	190 x 137 x 50	D45P	P2	136 x 120 x 45	V45Pabn	P2
AG70T	G	190 x 136 x 70	GB70GT	G	190 x 137 x 70	D65P	P2	136 x 120 x 65	V45Gabn	G
AG85TP	G	190 x 136 x 85	GB85GT	G	190 x 137 x 85	D38G	G	190 x 136 x 38	V45Labn	L
ALR25T	L	230 x 190 x 25	GB15LT	L	230 x 190 x 15	D50G	G	190 x 136 x 50	V45Mabn	M
AL35T	L	230 x 190 x 35	GRB20LTI	L	230 x 190 x 20	DT50G	G	190 x 136 x 50	GD15LT	L
ALR50T	L	230 x 190 x 50	GB25LT	L	230 x 190 x 25	D70G	G	190 x 136 x 70	GD25LT	L
AL65T	L	230 x 190 x 65	GB35LT	L	230 x 190 x 35	D38L	L	230 x 190 x 38	GD35LT	L
AMR25T	M	260 x 190 x 25	GB50LT	L	230 x 190 x 50	D50L	L	230 x 190 x 50	GD50LT	L
AMR38T	M	260 x 190 x 38	GB65LT	L	230 x 190 x 65	DB50L	L	230 x 190 x 50	GD65LT	L
AMR50T	M	260 x 190 x 50	GB15MT	M	260 x 190 x 15	D38M	M	260 x 190 x 38	GD15MT	M
AM65T	M	260 x 190 x 65	GRB20MTI	M	260 x 190 x 20	D50M	M	260 x 190 x 50	GD25MT	M
CA+PP		From -40°C to +200°C		From -40°C to +180°C		From -40°C to +200°C		From -40°C to +200°C		
V45PCA	P2	137 x 122 x 45	GB25MT	M	260 x 190 x 25	D45P	P2	136 x 120 x 45	V45PCD	P2
V45GCA	G	192 x 140 x 45	GB35MT	M	260 x 190 x 35	D65P	P2	136 x 120 x 65	V33GCD	G
V45LCA	L	232 x 192 x 45	GB50MT	M	260 x 190 x 50	D38G	G	192 x 140 x 38	V45GCD	G
V45MCA	M	260 x 190 x 45	GB65MT	M	260 x 190 x 65	DT50G	G	192 x 140 x 75	V75GCD	G
			GB85MT	M	260 x 190 x 85	D70G	G	190 x 136 x 70	VR25LCD	L


MATERIALS

HEAT SEALING FILMS


TABLE TOP SYSTEM

Reference	Characteristics	PP	for Containers					
			CA+PP	CA+PET	APET	CPET	ALc	ALbn
B1	T	X	X					
B1	TNAF	X	X					
B1	TMF	X	X					
B1	TSB			X	X	X		
B1	TSBAF			X	X	X		
B1	TSBMF			X	X	X		
B1	TSPBAF			X	X	X		
B1	TPBHAF			X	X	X		
B1	TA	X	X					X
B1	TAAF	X	X					X
B1	TPAAF	X	X					X
B1	TOPAU	X	X	X	X	X	X	X
B1	TAPUL	X	X	X	X	X	X	X
B1	TRBAF							



MATERIALS

HEAT SEALING FILMS


TABLE TOP SYSTEM

Reference	Characteristics	CA+PET	for Containers					
			APET	CPET	PLA	CA+PLA	ALc	
B1	TBFN	X	X	X	X	X	X	
B1	TADFN	X	X	X	X	X	X	X
B1	TAADFN	X	X	X	X	X	X	X

* according to the sealing temperature and/or the container material used, the film can be sealable and/or peelable

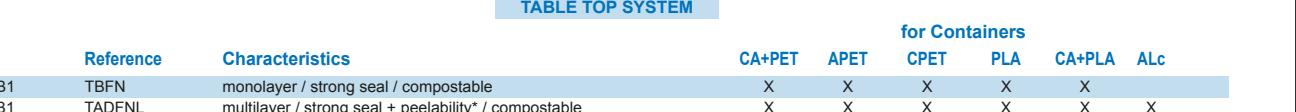Biodegradable and compostable films,
in compliance with norm EN13432.

MATERIALS

TRANSPARENT LIDS IN APET


Item	Series	(mm) L x B	for Containers			
			APET	CPET	ALbn	ALc
CTU.B.P (P0515)	P2	149 x 132		X	X	X
CTU.B.G (G0875)	G	203 x 149		X	X	X
CTU.B.L (L1570)	L	240 x 203		X	X	X
CTU.B.M (M1820)	M	273 x 203		X	X	X

No responsibility is implied or may be linked to this catalog.
All technical data does not have scientific value and are reported only for the purpose technical / application of the product.
Technological suitability: the product must always be verified by the user as regards the technological suitability referring to the production process, the packaging environment and the food to be packaged.



Compac s.r.l.
Via Spallanzani 8/a
42024 Castelnovo di Sotto - RE - Italy
Tel. +39 0522.688.509 / +39 0522.683.873
www.compac.it - info@compac.it

SCAN THE QR CODE
AND FIND OUT MORE



COMPANY WITH
FOOD SAFETY SYSTEM
CERTIFIED BY DNV
ISO 22000



COMPANY WITH
MANAGEMENT SYSTEM
CERTIFIED BY DNV
ISO 9001+ISO 14001
ISO 45001



COMPAC
PACKAGING

